

Shielded Fire Resistant Cable (Silicone version)




APPLICATION

BENKA fire performance cables are specially designed and manufactured for applications related to cable systems in building and transport infrastructure that require extreme fire resistance to reduce the consequences of personal injury and property damage. As such, they can be used for fire detection, alarm evacuation, fire alarm, RS485, audio, emergency lighting, and critical communication circuits used in public access buildings and industrial complexes.

These cables are engineered to maintain circuit integrity in case of fire, resulting in very low quantities of smoke and virtually no acidic gases being produced when burnt.

These cables also have aluminium foil screen with 100% coverage to reduce electromagnetic interference from external sources.

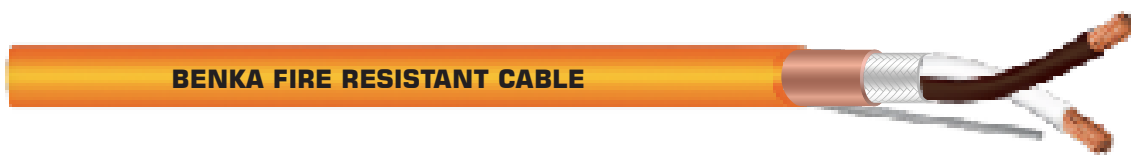

Construction	
Conductor	Stranded bare copper conductor, class 2/class 5
Insulation (fire barrier)	Cross-linked polyethylene (XLPE)/silicone compound, twisted in pair
Wrapping (optional)	Mica tape/fiberglass tape
Overall screen	Aluminium foil with tinned copper drain wire
Outer sheath	Low smoke zero halogen (LSZH) compound. Color: Orange, RAL 2003

Technical Data	
Working voltage	300/500V
Test voltage	2000V
Rated temperature	-30°C to +90°C
Conductor resistance (max) @20°C (Ω/km)	According to IEC 60228 0.5 mm ² : 39; 0.75 mm ² : 26; 1.0 mm ² : 19.5; 1.5 mm ² : 13.3; 2.5 mm ² : 8.1;...
Capacitance (max) (nF/km)	120 (C/C); 240 (C/S);...
Impedance	65 Ω
Recommended current (max) @25°C (Amps)	0.5 mm ² : 3.2; 0.75 mm ² : 6.3; 1.0 mm ² : 10.5; 1.5 mm ² : 14.5; 2.5 mm ² : 20.8;...
Flame retardant	IEC 60332-1
Flame propagation	IEC 60332-3-22
Fire resistant	IEC 60331-21, DIN 4102-12 (~BS 6387 & IEC 60331)
Halogen free	IEC 60754-1
Acid and corrosive gases	IEC 60754-2
Smoke density	IEC 61034-2
Standard & Approval	ROHS, IEC, TUV
Minimum bending radius	8 x OD (static)

■ Shielded Fire Resistant Cable (Silicone version)



Part No.	Dimension n x mm ²	Cable OD mm	Copper index kg/km	Weight kg/km
236 1250-ER	1PR x 0.5	5.2 ± 1.0	13	39
236 2250-ER	2PR x 0.5	7.6 ± 1.0	22	64
236 3250-ER	3PR x 0.5	8.1 ± 1.0	32	81
236 4250-ER	4PR x 0.5	8.8 ± 1.0	40	99
236 5250-ER	5PR x 0.5	10.0 ± 1.0	49	123
236 1275-ER	1PR x 0.75	5.6 ± 1.0	18	43
236 2275-ER	2PR x 0.75	8.3 ± 1.0	31	70
236 3275-ER	3PR x 0.75	8.8 ± 1.0	44	93
236 4275-ER	4PR x 0.75	9.9 ± 1.0	59	136
236 5275-ER	5PR x 0.75	10.9 ± 1.0	70	167
236 1210-ER	1PR x 1.0	6.2 ± 1.0	18	51
236 2210-ER	2PR x 1.0	8.9 ± 1.0	35	94
236 3210-ER	3PR x 1.0	10.2 ± 1.0	51	134
236 4210-ER	4PR x 1.0	11.1 ± 1.0	68	165
236 5210-ER	5PR x 1.0	12.5 ± 1.0	85	200
236 1215-ER	1PR x 1.5	6.5 ± 1.0	28	62
236 2215-ER	2PR x 1.5	9.7 ± 1.0	52	121
236 3215-ER	3PR x 1.5	10.9 ± 1.0	77	167
236 4215-ER	4PR x 1.5	11.8 ± 1.0	100	207
236 5215-ER	5PR x 1.5	13.4 ± 1.0	125	252
236 1225-ER	1PR x 2.5	8.0 ± 1.0	44	92
236 2225-ER	2PR x 2.5	12.4 ± 1.0	85	185
236 3225-ER	3PR x 2.5	13.2 ± 1.0	125	252
236 4225-ER	4PR x 2.5	14.7 ± 1.0	165	319
236 5225-ER	5PR x 2.5	16.5 ± 1.0	205	392
236 1310-ER	1TR x 1.0	6.8 ± 1.0	28	75
236 1315-ER	1TR x 1.5	7.2 ± 1.0	43	93
236 1325-ER	1TR x 2.5	9.7 ± 1.0	65	141
236 1240-ER	1PR x 4.0	10.0 ± 1.0	67	153
236 1260-ER	1PR x 6.0	11.6 ± 1.0	101	214
236 12100-ER	1PR x 10.0	14.1 ± 1.0	168	319